

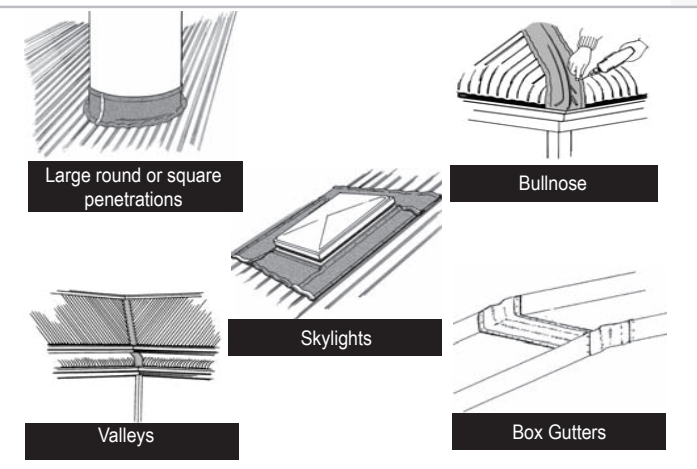


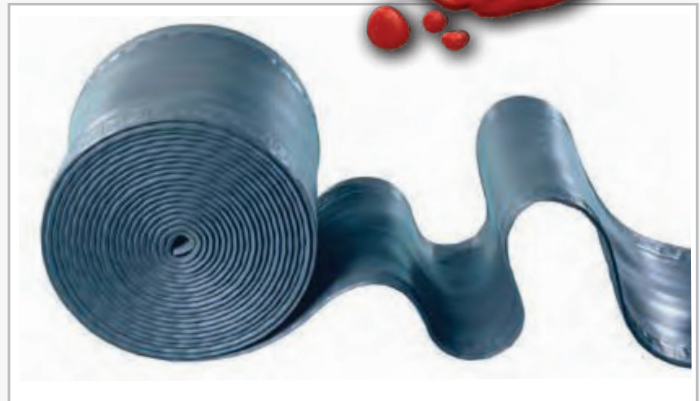

A Skellerup Industries Company

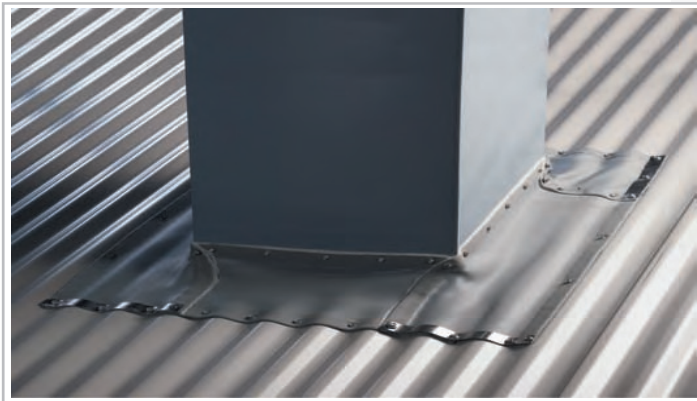

Dekstrip® Flashing

Forms and stretches to solve all those flashing problems!



- Flashes hi-rib & standing seam profiles
- Stretch and form to fit and seal
- Flash between dissimilar materials
- Handles vibration and expansion
- Twenty five year warranty
Just fit and forget it - we've got you covered





www.lakeside-fasteners.com

To Order Call: 800-537-4160 Or Visit our Website



Selection Guide

Deks Code	Length		Width	
	m	feet	mm	inch
DS23-180	23	75'	180	7"
DS23-235	23	75'	235	9"
DS23-305	23	75'	305	12"
DS15-450	15	50'	450	18"
DS10-180	10	32'	180	7"
DS10-235	10	32'	235	9"
DS10-305	10	32'	305	12"
DS3-235	3.1	10'	235	9"

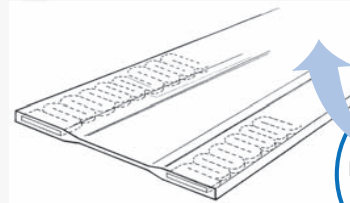

EXCLUSIVE 'CONCRETINA' EDGES STRETCH UP TO 25%

Sealant

Because of the unique properties of TPE, Deks recommends Butyl Mastic as a sealant in all applications.




Paint to Match Roof

After installation, and preferably after a period of 'weathering', Dekstrip® can be painted with any good quality 100% acrylic paint after priming with an epoxy resin-based primer.

Easy to fix


Square Ducts, Chimney, Skylights

Expand one edge and use separate strips, lapped and joined, to seal around the penetration




Large Round Pipes

Flash round pipes in one go, stretching the lower edge to fit. Join using fasteners or sealant.




Expansion Joints

The flexibility of Dekstrip® makes it ideal for joining box guttering. Ezi-strip is required for installation. (Code EZISTRIP)




Flash Dissimilar Materials



Dekstrip® is compatible with most materials and can successfully flash between:

- Brick
- Fibre Cement
- Galvanised Steel
- Aluminium
- Stainless Steel
- Concrete

Flash dissimilar Roof Profiles



When flashing dissimilar roof profiles such as a house roof to a verandah, install as follows:

1. Junction gap should be no more than 180cm
2. Measure length.
3. Stretch to suit profile on both sides.
4. When satisfied with the shape and fit and there are no stress lines, seal with Butyl Mastic Sealant then screw/rivet fix in the valley/pan of the profile.