DEKS
EASY TO WORK WITH

Solar Solutions

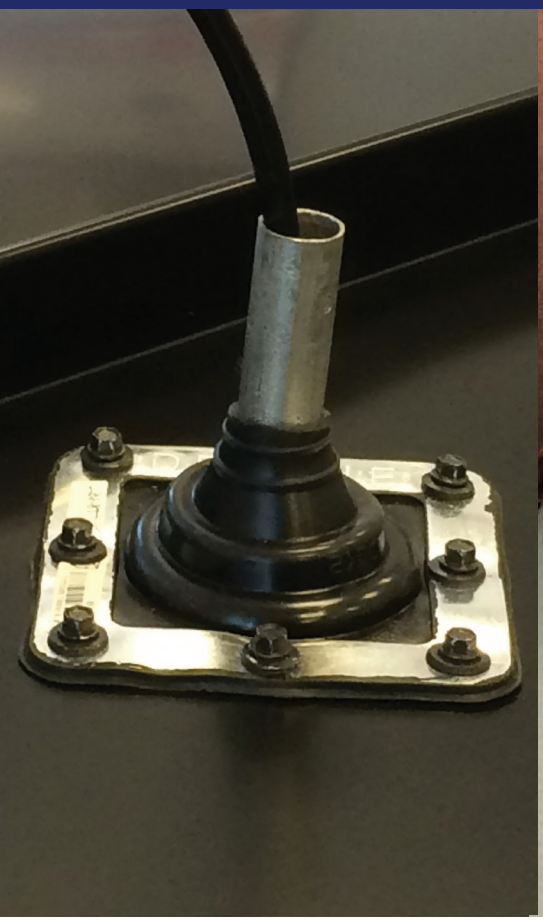

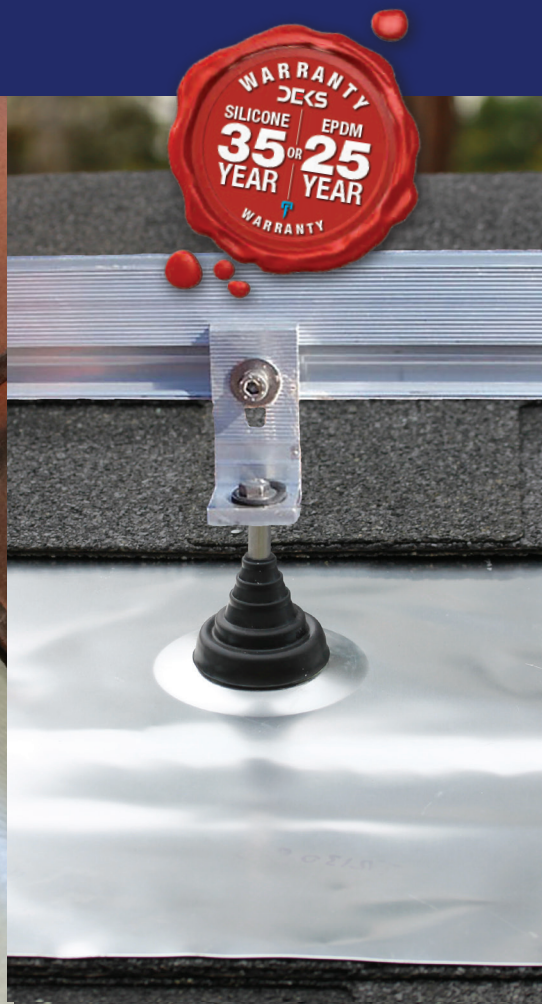

Dektites for the Solar Market

Don't waste time or risk call backs by using silicone, use the professional's choice for flashing.

- ☑ Conduit, Standoff & Stanchion Penetrations Long Term Watertight Seal
- ☑ Lead Free Flashings
- ☑ Quick & Easy Installation, Lower Cost Than Composition Mount Flashing Systems
- ☑ Roofing Manufacturer's Specified Flashing System - does not void warranties.
- ☑ Conforms to Various Roof Profiles - Clay, Tile, Shingle & Metal Roofs

bsi. ISO 9001 Quality Management FS 520679

UPC®

To purchase contact us at: ***800-537-4160*** *(toll free)*
www.lakeside-fasteners.com

LAKESIDE™
CONSTRUCTION FASTENERS

DEKS
EASY TO WORK WITH

Solar Solutions

Selection Guide

DEKS Code	Description	Pipe OD Range	Base Size	Roof Pitch	Colours
For Shingle Roofs					
SDA1311-10TB	Dektite Aluminum Base	0-0.75" -	11"x13"	up to 12/12	Black EPDM
SDA100B	Dektite Aluminum Base	0.5" - 2.75"	19.7" x 23.6"	up to 12/12	Black EPDM
DST101B	Dektite Thermoplastic Base	1.25" - 1.5"	9.25" x 13"	up to 12/12	Black EPDM
DST102B	Dektite Thermoplastic Base	2"	9.25" x 13"	up to 12/12	Black EPDM
DST103B	Dektite Thermoplastic Base	3"	9.25" x 13"	up to 12/12	Black EPDM
DST104B	Dektite Thermoplastic Base	4"	12" x 16"	up to 12/12	Black EPDM
For Metal Roofs					
DFE10MB	Dektite Square Base Micro	0 - 0.75"	2.75" x 2.75"	up to 12/12	Black EPDM
DF100	Dektite Square Base Mini	0 - 1.5"	4" x 4"	up to 12/12	Black EPDM, Grey EPDM, Red Silicone
DFE101	Dektite Square Base #1	0.25" - 2.25"	5.5" x 5.5"	up to 12/12	Black EPDM, Grey EPDM, Red Silicone
DFE102	Dektite Square Base #2	0.25" - 3"	7" x 7"	up to 12/12	Black EPDM, Grey EPDM, Red Silicone
DF100	Dektite Round Base Mini	0 - 1.5"	3.6"	up to 10/12	Black EPDM, Grey EPDM, Red Silicone
DF101	Dektite Round Base #1	0.25" - 2.5"	4.8"	up to 10/12	Black EPDM, Grey EPDM, Red Silicone
DF102	Dektite Round Base #2	0.25" - 3"	6.5"	up to 10/12	Black EPDM, Grey EPDM, Red Silicone
For Clay/Tile Roofs					
DFM1212-10TGB	DekForm Base	0 - 0.75"	12" x 12"	up to 12/12	Black EPDM
DFM102GB	DekForm Base	0.5" - 2.75"	16" x 19.25"	up to 12/12	Black EPDM

Available in Black and Grey EPDM or Red Silicone.
EPDM will withstand contstant temperatures at the roofline of -58°F to 239°F and up to 302°F intermittently.
Red Silicone will withstand constant temperatures at the roofline of -58°F to 392°F and up to 482°F intermittently.
Please Note that the outside temperature of the pipe may be significantly different to the exit temperature of the appliance.

Installation Information

1. Trim the cone to suit pipe size using sharp tin snips.



2. Slide down pipe using water as a lubricant.



3. Apply sealant by turning back flexible flange.



4. Press base to the roof profile by hand. Smooth out any awkward creases. Don't fully extend to allow for vibration.



5. Fasten using self-sealing fasteners or pop (sealed) rivets.



* A Dektite may be fitted on the 'diamond' for enlarged holes and penetrations on steep pitched roofs up to 12/12 or deep corrugations.