SD PRO-TEK™

IN STOCK!

- **Concealed Weather-Tite Washer!**
- **Forged Drill Point for MAX Cutting Power!**
- **Engineered Low Profile Head!**

- **Innovative Cut Threads!**

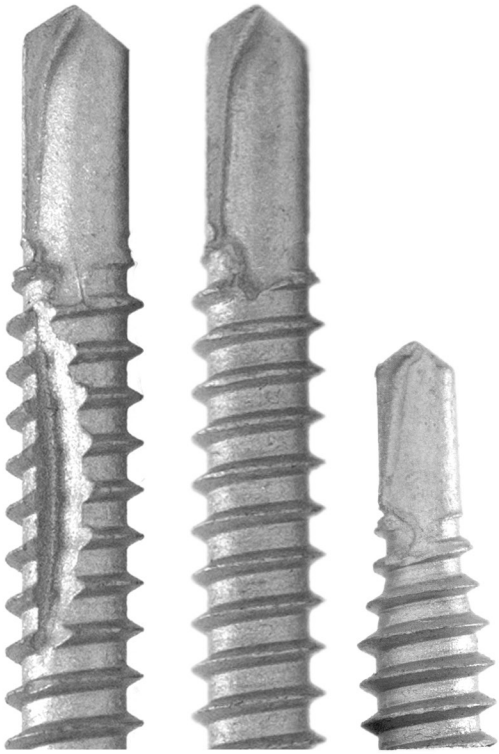

LAKESIDE™ CONSTRUCTION FASTENERS

To purchase contact us at:
1203 Goldsmith Road, Paragould, AR 72450
***870-586-0703** (office) \ **870-586-0643** (fax)*
***800-537-4160** (toll free)*
www.lakeside-fasteners.com

"Lakeside Construction Fasteners Providing Alternative Fastener and Foam Solutions!"™

SD PRO-TEK™

Fastener Dia.: #12
Head Size: 5/16"
Threads: 14 per inch
Innovation: Self Driller Point & Cut Threads
SD Point: SD1 & SD3
HWH: Low Profile Head
Material: C1022
Washer: EPDM Tubular
Coating System: L3 Dura Protec™

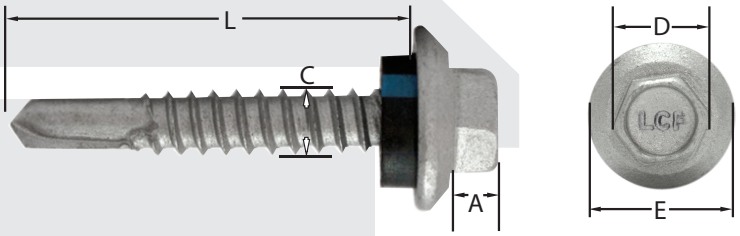

Part #	L	A	C	D	E
1234250PTKSD3SG	3/4" Stitch	.14	.215	5/16	.410
1478250PTKSD1SG	7/8" LAP	.14	.215	5/16	.410
1210250PTKSD3SG	1"	.14	.215	5/16	.410
1214250PTKSD3SG	1 1/4"	.14	.215	5/16	.410
1215250PTKSD3SG	1 1/2"	.14	.215	5/16	.410
1220250PTKSD3SG	2"	.14	.215	5/16	.410

PULL-OUT TEST VALUES

Fastener Type	12 ga.	14 ga.	16 ga.
Pro-Tek™ 12-14	1679 lbs.	1107 lbs.	932 lbs.
Pro-Tek™ 1/4-14	1269 lbs.	1050 lbs.	683 lbs.

FASTENER SYSTEM VALUES

Fastener Type	Torsional	Shear	Tensile
Pro-Tek™ 12-14	115 in lbs.	2235 lbs.	3300 lbs.
Pro-Tek™ 1/4-14	160 in lbs.	2755 lbs.	3915 lbs.

PULLOVER TEST VALUES

Fastener Type	24 ga.	26 ga.	29 ga.
Pro-Tek™ 12-14	1315 lbs.	1099 lbs.	717 lbs.
Pro-Tek™ 1/4-14	1295 lbs.	1027 lbs.	749 lbs.

Note: Testing values are nominal

Standard Options:

Wet Paint

CUT THREADS

Lakeside Packaging 250 PIECES

Customized Options:

Powder Coat

NO WASHER

Lakeside Packaging 100 PIECES

Available Without Washer Upon Request.

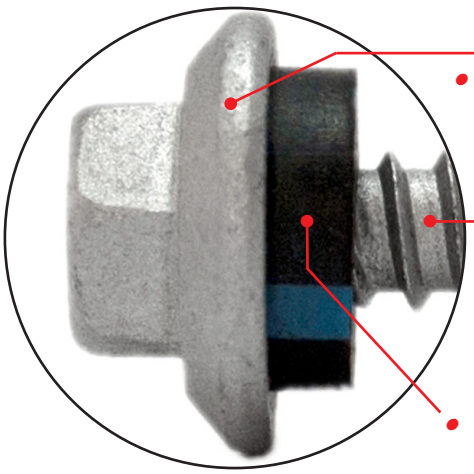

- ***Engineered Head to Prevent Wobble!***
- ***Deep Root Threads for Max Holding Power!***
- ***Concealed Washer***

SD Pro-Tek™ self-drilling fastener is developed for metal-to-metal building applications. The innovative **SD Pro-Tek™** with a larger head diameter limits wind uplift, and the concealed EPDM tubular washer system allows for a weather-tite seal. The engineered flat surface area on the **SD Pro-Tek™** also provides positive nutsetter engagement, preventing wobble during fastener install. Deep root cut threads give the **SD Pro-Tek™** Maximum Holding Power when installed into metal building panels!

LAKESIDE™ CONSTRUCTION FASTENERS

FOLLOW US ON YouTube

To purchase contact us at:
1203 Goldsmith Road, Paragould, AR 72450
***870-586-0703** (office) \ **870-586-0643** (fax)*
***800-537-4160** (toll free)*
www.lakeside-fasteners.com