SC110VENT™

Your Complete Ridge Venting Solution!

The **SC110VENT™** by Lakeside Construction Fasteners offers installers and contractors an affordable premium venting system with one of the lowest in place cost! The patented design of the **SC110VENT™** open cell structure prevents water, dirt, and snow from penetrating the building structure at the ridge cap. **SC110VENT™** promotes positive air ventilation throughout the building envelope which starts at the ridge cap! The special formulated UV Coating allows the **SC110VENT™** to resist high temperature environments and prevents the open cell structure from collapsing! The **SC110VENT™** is Your Complete Ridge Venting Solution!

SC110VENT™ SYSTEM:

- **Designed for Low Cost Installation!**
- **Dade County (HWHZ) 110 MPH Approved!**
- **Florida Building Code Approved! (FL # 4640-R1)**
- **2 Adhesive Strips for Secure Installation!**
- **40 Year Limited Warranty!**

Made in the U.S.A.

WATER PROOF · DIRT PROOF · SNOW PROOF · HEAT PROOF · INSECT PROOF

RIDGE VENT SECURE™

LAKESIDE™ CONSTRUCTION FASTENERS

FOLLOW US ON YouTube

To purchase contact us at:
1203 Goldsmith Road, Paragould, AR 72450
***870-586-0703** (office) \ **870-586-0643** (fax)*
***800-537-4160** (toll free)*
www.lakeside-fasteners.com

2-2023_V25

Your Complete Ridge Venting Solution!

SC110VENT™

Your Complete Ridge Venting Solution!

Description: 1-1/4" x 10' - (10 rolls per carton)
1-1/2" x 10' - (10 rolls per carton)
2-1/4" x 10' - (10 rolls per carton)
1-1/4" x 50' - (36 rolls per tote)
1-1/2" x 50' - (36 rolls per tote)
2-1/4" x 50' - (30 rolls per tote)

Size: Panel Profiles from 1/2" to 2"

Innovation: Patented UV & Antimicrobial Coating
2 Adhesive Strips

Material: Open Cell; Promotes Free Air Flow

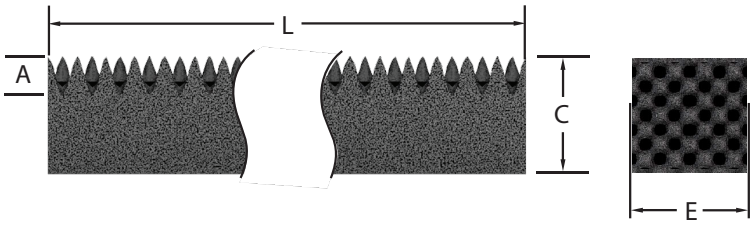

Part #	L	C	A	E
11410SV	10'	1 1/4"	1/2"	2"
11210SV	10'	1 1/2"	1/2"	2"

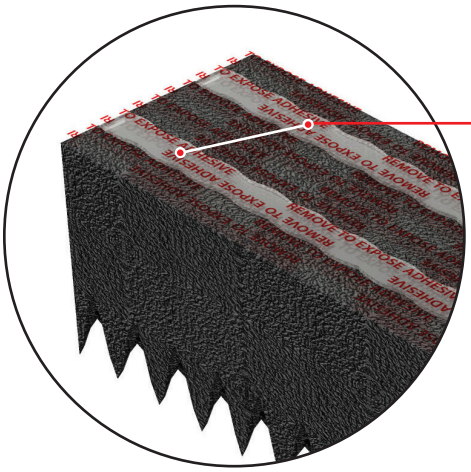

- ***2 Adhesive Strips for Secure Insulation!***

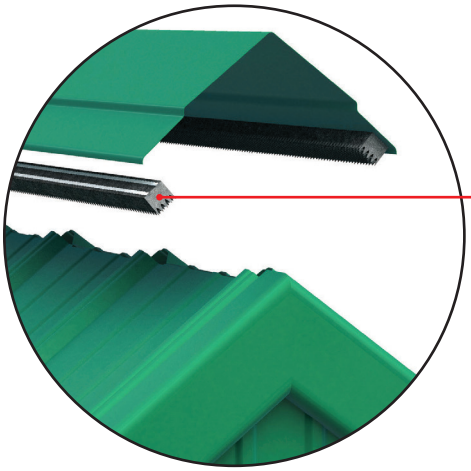

- ***Designed for Low Cost Fast Installation!***

Specifications

Air Permeability	760 Cubic Feet per minute
Heat Resistance	325˚F (163˚C) for 550 hours
Cold Crack	-130˚F (-55˚C)
Snow Infiltration	0
Tensile Strength	16 PSI – Elongation 175%
Attic Ventilation	Meets UBC Code
Net Free Area	17.6 sq. inches per Linear Foot at the ridge
Fire Rated	ASTM E84 CLASS A

RIDGE VENT SECURE™

Made in the U.S.A.

LAKESIDE™ CONSTRUCTION FASTENERS

To purchase contact us at:
1203 Goldsmith Road, Paragould, AR 72450
***870-586-0703** (office) \ **870-586-0643** (fax)*
***800-537-4160** (toll free)*
www.lakeside-fasteners.com