

Multi-Purpose Adhesive Sealant




Adheres To

- Vinyl
- Brick
- Fiberglass
- Aluminum
- RV
- Concrete
- Masonry
- Wood
- Stone
- Marine
- Fiber Cement
- Steel
- Ceramics
- Building Paper
- Single-Ply

Product Advantages

- Waterproof, Premium All-Weather Silicone
- Excellent Tooling Characteristics
- Service Temperature -40 F to +400 F
- Application Temperature -20 F to +120 F
- UV and Mildew Resistant
- Permanently Flexible
- Will Not Shrink, Crack, Sag or Slump
- Weather Tight Seal
- Low Odor
- Solvent Free
- Invisible to UV Light
- Easily Gunned at all Temperatures

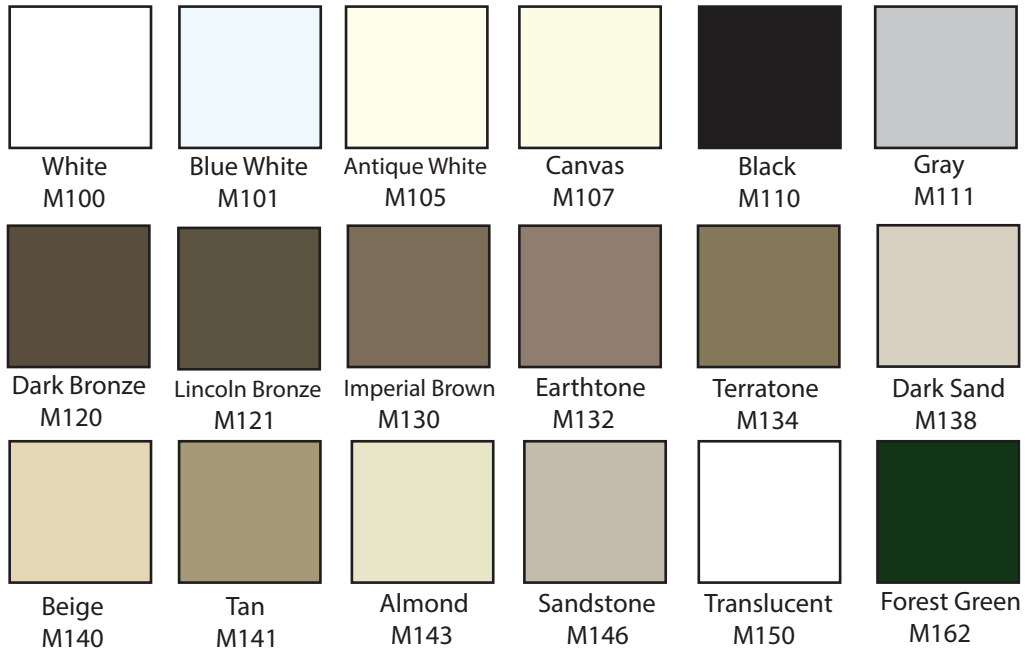

Product Information

- Description - Multi-Purpose Adhesive Sealant
- Item Number - 02-MX0XXXX-10C1
- Size - 10.3 FL. OZ (304 mL)
- Unit Dimensions - 9" X 2" X 2"
- **Over 60 colors available for siding, fiber cement, roofing, gutters, coil & trim**

Case Pack Information

- Description - Multi-Purpose Adhesive Sealant
- Item Number - 02-MX0XXXX-10C1
- Dimensions - 11 15/16" X 9 15/16" X 8 1/8"
- Case Weight - 10 lbs - 12 packs
20 lbs - 24 packs
- Cases Per Pallet - 60 - 24 packs
120 - 12 packs

CAUTION! IRRITATES EYES: Read back page carefully for cautions

Multi-Purpose Adhesive Sealant

Technical Information

Product: Novaflex
 Multi-Purpose Sealant
 Appearance: Smooth paste
 Application Temperature:
 -20 °F to +120°F
 (-28°C to 50°C)
 Service Temperature:
 -40°F to +400°F
 (-40°C to 200°C)
 Adhesion: Excellent to
 most common building
 materials
 Consistency: Non-sag
 Bridging Ability: Excellent,
 bridges gaps to 3/4" (2 cm)
 Gunning Extrusion:
 Very easy to gun and clean up
 Durability: +/- 25% joint movement
 Flexibility: Remains flexible to -40°F
 Water Resistance: Excellent
 – Not to be submerged
 Exterior Weathering:
 Excellent
 Aging: Excellent
 Freeze-Thaw Stable:
 Will Not Freeze
 Odor: None
 Skin Time:
 • 40°F/40% relative
 humidity – 40 minutes
 • 75°F/50% relative
 humidity – 10 minutes
 • 95°F/95% relative
 humidity – 5 minutes
 Through and Cure Time:
 • 40°F/60% relative
 humidity – 2-3 days
 • 75°F/50% relative
 humidity – < 24 hrs
 Weight per gallon: 10.2 pounds
 Solids: 97%
 Flash Point: > 400°F

Novaflex[®] Multi-Purpose Adhesive Sealant is a premium all-weather medium modulus silicone that stays flexible and resistant to cracking and discoloration. Cured sealant resists mildew. This premium all-weather silicone is tack free in 10 minutes and is completely cured in up to 2 days. Cure time is with above 30% relative humidity and varies with temperature and humidity.

Product Specs

Coverage: 28 linear ft. using a 1/4" bead or 14 linear ft. using a 3/8" bead.

Specifications: Meets or exceeds the performance characteristics of:
 ASTM C-920, AAMA 802.3, 805.2, 808.3, TT-S-001543A and TT-S-230C.

Shelf life: Use product within 18 months from manufacturers date. FREEZE THAW STABLE. Store product at 40°F to 80°F.

MAX VOC: less than 34 g/l (<4% by weight). VOC compliant in all 50 states.

Recommended For Sealing

- Windows
- Doors
- Metal Roofs
- Head Expanders
- Door Sills
- Flashing
- Cap Beading
- Reglazing Broken/Defective Glass
- Gutters
- Nail Fins
- Fiber Cement
- Vinyl Siding
- Trim Coil

Not Recommended For

- Joints continuously submerged under water
- Areas needing paint or stain
- Spaces confined from atmospheric moisture during cure
- On surfaces that might bleed oils, plasticizers or solvents
- In structural glazing applications
- Painted Applications

Limited Warranty: Satisfaction guaranteed when handled and applied according to label instructions. Call 1-800-537-4160 for Customer Service.

CAUTION!: Methyl ethyl ketoxime, methyl and thyl alcohol released during cure. Avoid breathing vapors. Avoid prolonged or repeated skin contact.

KEEP OUT OF REACH OF CHILDREN

First Aid: Skin: Wash with soap and water. Eyes: SEEK IMMEDIATE MEDICAL ATTENTION. Inhalation causing discomfort: Remove to fresh air. If discomfort persists or any breathing difficulty occurs, or if swallowed, SEEK IMMEDIATE MEDICAL ATTENTION. Additional information please refer to MSDS.

Disposal: For disposal of material follow federal, state and local regulations.



LAKESIDE[™]
CONSTRUCTION FASTENERS

To purchase contact us at:
800-537-4160 (toll free)
www.lakeside-fasteners.com